

APPROVED

| REVISIONS |      |                 |           |          |  |  |  |  |
|-----------|------|-----------------|-----------|----------|--|--|--|--|
| ZONE      | REV. | DESCRIPTION     | DATE      | APPROVED |  |  |  |  |
|           | Α    | INITIAL RELEASE | 2/16/2021 | JP       |  |  |  |  |

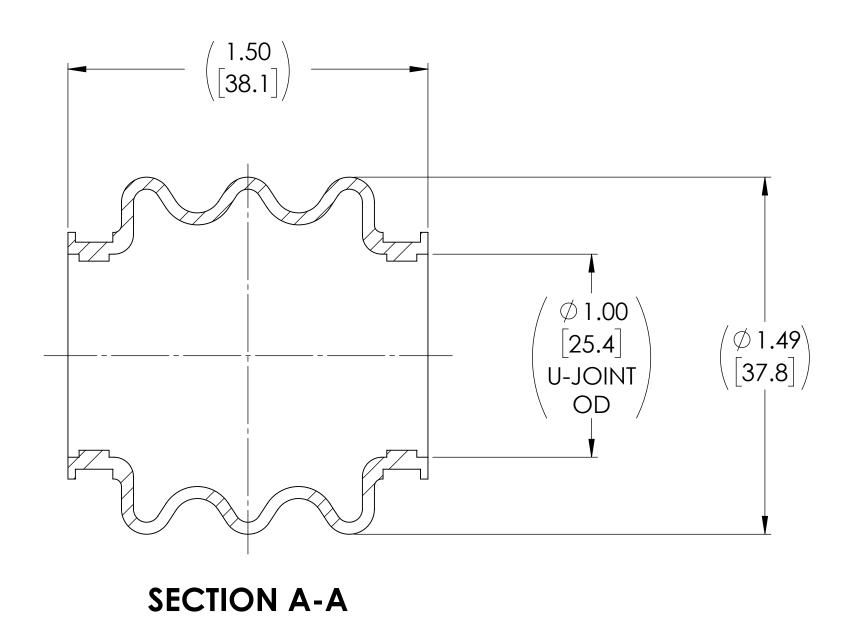

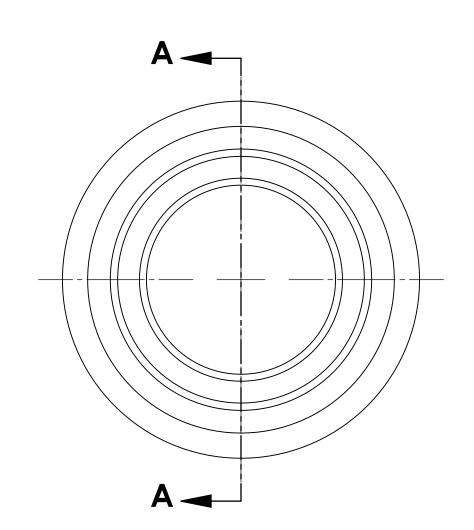

NOTE(s), UNLESS OTHERWISE SPECIFIED.

(1) MATERIAL: NITRILE

a. COLOR: BLACK

b. DUROMETER: 50±5 (SHORE A SCALE).

## DO NOT SCALE DRAWING

|          | OTHERWISE SPECIFIED                                      | STANDARD TOLERANCES,   | MATERIAL                   |           | INITIALS  | DATE       | Belden Universal |                              |                 |       |        |
|----------|--|--|----------------------------|-----------|-----------|------------|------------------|------------------------------|-----------------|-------|--------|
|          | AMFER ALL HOLES ALL SHARP CORNERS                        | UNLESS OTHERWISE SPECIFIED   | SEE NOTES  HEAT TREAT  N/A | DRAWN     | JP        | 16FEB21    |                  |                              |                 |       |        |
| DE-E     | BURR ALL FEATURES  | DIMENSIONS ARE IN INCHES [mm]  |                            | CHECKED   | RNK       | 03/08/2021 | TITLE:           | <sup>tle:</sup> BOOT, NITRII |                 |       |        |
| TURNE    | 63/<br>ED SURFACES: V                                    | ANGULAR MACHINED: ±1.0°  <br>  FRACTIONAL: ±.015"  <br>  TWO PLACE DECIMAL: ±.010" |                            | ENG APPR. | RNK       | 03/12/2021 |                  |                              |                 | RILE  | _E     |
|          | 125/   |  |                            | MFG APPR. |           |            |                  |                              | .,              |       |        |
| MILLE    | o surfaces: V  | THREE PLACE DECIMAL: ±.005"<br>FOUR PLACE DECIMAL: ±.0005"                         |                            | QC APPR.  |           |            |                  |                              |                 |       |        |
| PROPRIE  | TARY AND CONFIDENTIAL                                    | CONCENTRICITY: .0025" T.I.R.   |                            | COMMENT   | COMMENTS: |            |                  |                              |                 |       |        |
| THE INFO | FORMATION CONTAINED IN THIS                              | ALL HOLES TO BE LOCATED ON   | FINISH                     |           |           |            | SIZE             | DWG.                         | NO.             |       | REV    |
|          | IG IS THE SOLE PROPERTY OF<br>ENUNIVERSAL. ANY           | CENTERLINE ( $\mathbb{Q}$ ) WITHIN .005" T.I.R.                                    | SEE NOTES                  |           |           |            |                  | 10                           | 000 BOOT        |       | Α      |
|          | CTION IN PART OR AS A WHOLE<br>THE WRITTEN PERMISSION OF | INTERPRET GEOMETRIC TOLERANCES   | 5                          |           |           |            |                  | 10                           | 1000 0001 7     |       |        |
|          | N UNIVERSAL IS PROHIBITED.                               | I.A.W. ASME Y14.5  |                            |           |           |            | SCAL             | E: 2.5:1 V                   | WT (Lbs): 0.016 | SHEET | 1 OF 1 |

FORM SW-A 5-18 8 7 6 5 4